COREtec®

Product Specifications


VV489	
Solid Polymer Core	
Enhanced Painted Bevel	
7" wide, 48" long	
US Units	Metric Units
7.2"	18 cm
48.03"	122 cm
20 mil (0.02")	0.5 mm
0.196"	5 mm
0.157"	4 mm
Attached Cork	
0.039"	1 mm
UV Acrylic	
Floating or Direct G	lue
Angle/Tap	
Imported	
28.84 sq ft	3 sq m
12 pcs	
48.5 lbs	21.99 kg
	Solid Polymer Core Enhanced Painted I 7" wide, 48" long US Units 7.2" 48.03" 20 mil (0.02") 0.196" 0.157" Attached Cork 0.039" UV Acrylic Floating or Direct O Angle/Tap Imported 28.84 sq ft 12 pcs

50 boxes



Colors

Boxes per Pallet

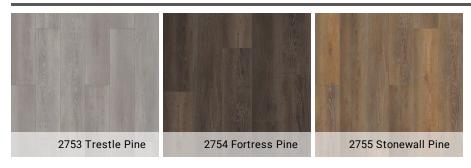

Performance

Resistance to Heat (ASTM F1514)	Passes	
Resistance to Light (ASTM F1515)	Passes	
Resistance to Chemicals (ASTM F925)	Passes	
Smoke Density (ASTM E662)	Passes	
Radiant Panel (ASTM E648)	Passes, Class I	
Slip Resistance (ASTM D2047)	ADA compliant	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

COREtec Pro Plus HD 7"

COREtec Pro Plus HD 7"



Warranties

USF Lifetime

Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof

USF 15 Year Heavy Commercial

Coordinating Trim



Stair Tread 03Z70 | 48"))